




Luvanto
Luxury Design Flooring

CLICK & CLICK HERRINGBONE TECHNICAL SPECIFICATION

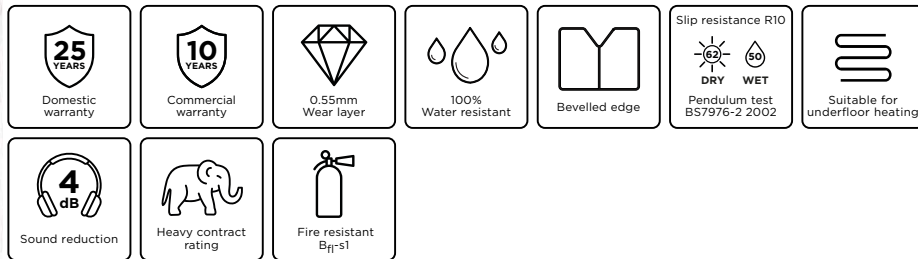

Characteristics	Test Method	Click
Warranty (Years)	-	Domestic 25 Commercial 10
Level of Use	EN685	Heavy Domestic 23 Heavy Commercial 32
Total Thickness	EN428	4.0mm
Wear Layer	EN429	0.55mm
Total Weight	EN430	8.15kg/m ²
Dimensions (Planks)	EN427	180mm x 1220mm
Dimensions (Sparkle)	EN427	149mm x 935mm
Dimensions (Tiles)	EN427	305mm x 610mm
Dimensions (Herringbone)	EN427	149mm x 596mm
Surface Treatment	-	PU
Sound Reduction	ISO 10140-3/ISO717-2	4dB
Slip Resistance	DIN 51130	R10
Pendulum Test	BS7976-2:2002	Dry 62 (Low) / Wet 50 (Low)
Abrasion Resistance	EN660-2	Wear Group P
Residual Indentation	EN433	<0.1mm
Castor Chair Resistance	EN425/ISO 4918 25000 cycles	Pass
Colour Fastness to Light	ISO 105 B02	>6
Dimensional Stability	EN434	<0.25%
Squareness and Straightness	EN427	<0.07mm / <0.10mm
Stain Resistance	EN423	Pass
Flammability	EN13501-1:2007	Bfl-S1
Formaldehyde Emission	EN14041:2004	Class E1
Fungi Resistance	ISO846	Growth Intensity 0
Water Resistant	-	100%
VOC Emission	-	A+
REACH	EC No 1907/2006	Pass
Underfloor Heating	-	Suitable, Max 27°C

Product	Size	Pack Coverage	Pieces Per Pack	Boxes Per Pallet	Bevelled Edge
Click - Planks	180mm x 1220mm x 4.0mm	2.20m ²	10	40	Micro-Bevel
Click - Tiles	305mm x 610mm x 4.0mm	2.22m ²	12	36	Micro-Bevel
Click - Sparkle	149mm x 935mm x 4.0mm	1.67m ²	12	42	Micro-Bevel
Click - Herringbone	149mm x 596mm x 4.0mm	2.13m ²	24	36	Micro-Bevel