

Luvanto Luxury Design Flooring

Premium Additions

Introducing a new collection of premium wood and stone designs for the most authentic natural look.

The latest technology in registered grain embossing and super matt surface gives a finish that is hard to tell apart from the real materials.



Premium Design Planks, Design Herringbone & Click Plus Planks

Available in 4 colours, the Premium Additions to our Design, Design Herringbone and Click Plus ranges feature an ultra-realistic registered emboss wood grain with a modern, luxurious super-matt finish. Design and Click Plus planks are in a new longer and wider plank size.

The 4 wood colours available in Premium Design planks and Premium Design Herringbone are the same, which gives a lot of design possibilities to run between straight lay planks and herringbone in the same area.





Old English Oak

Design Planks	Design Herringbone	Click Plus Planks
192mm x 1230mm x 2.5mm	107mm x 534mm x 2.5mm	228mm x 1220mm x 5mm
Latte Oak - QAF-LVP-43	Latte Oak - QAF-DES-18	Latte Oak - QAF-LKP-26
Classic Oak - QAF-LVP-44	Classic Oak - QAF-DES-19	Classic Oak - QAF-LKP-27
Golden Oak - QAF-LVP-45	Golden Oak - QAF-DES-20	Golden Oak - QAF-LKP-28
Old English Oak - QAF-LVP-46	Old English Oak - QAF-DES-21	Old English Oak - QAF-LKP-29

Premium Click Plus Stone

Contemporary natural stone colours with a super-matt finish.



Glacier Grey





Black Marble



Click Plus Tiles 305mm x 610mm x 5mm Glacier Grey - QAF-LKT-08 Black Marble - QAF-LKT-09 Oyster Marble - QAF-LKT-10 Regency Stone - QAF-LKT-11

Premium Click Plus Basketweave

Introducing our award winning Premium Basketweave in a Versailles Parquetry style. Only available in Click Plus, these one piece panels click together to allow statement design floors to be fitted very quickly and provide a real alternative to complex glue-down LVT patterns.

Click Plus

600mm x 600mm x 6mm Coverage - Per box 6 Pieces = 2.16m²

Spring Oak - QAF-LKB-01 Autumn Oak - QAF-LKB-02



Spring Oak

Premium Click Plus Chevron

Our Chevron Click Plus planks feature an enhanced wood grain panel design to give the effect of multiple smaller pieces laid together. Each piece has a bevelled edge and really shows off the variation in colour and texture of the wood effect. Extra long planks for quicker installation without the headache of fitting these complex patterns in glue down format.

Click Plus

305mm x 1408mm x 8mm - Angle of pattern 60° Coverage - Per box 4 Pieces (2 x plank A and B) = $1.72m^2$



Oyster Marble

Regency Stone






Autumn Oak

Technical Data

Produced to the following standards: ISO 9001; ISO 14001.

Technical	Test Method	Design	Click Plus	Basketweave	Chevron
Information		Decigin		Dabhothicare	
Warranty (Years)	-	Domestic 25 Commercial 10	Domestic 25 Commercial 10	Domestic 25 Commercial 10	Domestic 25 Commercial 10
Level of Use	EN685	Heavy Domestic 23 Heavy Commercial 33	Heavy Domestic 23 Heavy Commercial 33	Heavy Domestic 23 Heavy Commercial 34	Heavy Domestic 23 Heavy Commercial 34
Total Thickness	EN428	2.5mm	5.0mm (including 1.0mm IXPE underlay)	6.0mm (including 1.0mm IXPE underlay)	8.0mm (including 1.0mm IXPE underlay)
Wear Layer	EN429	0.55mm	0.55mm	0.55mm	0.55mm
Total Weight	EN430	4.55kg/m²	8.18kg/m²	-	-
Dimensions (Planks)	EN427	192mm x 1230mm	228mm x 1220mm	600mm x 600mm	305mm x 1407.8mm
Dimensions (Tiles)	EN427	-	305mm x 610mm	-	-
Dimensions (Herringbone)	EN427	107mm x 534mm	-	-	-
Surface Treatment (embossing)	-	PU	PU	EIR	EIR
Sound Reduction	ISO 10140-3/ ISO717-2	4dB	21dB	20dB	18dB
Slip Resistance	DIN 51130	R10	R10	R10	R10
Pendulum Test	BS7976-2:2002	Dry 62 (Low) Wet 50 (Low)	Dry 62 (Low) Wet 50 (Low)	-	-
Abrasion Resistance	EN660-2	Wear Group P	Wear Group P	-	-
Residual Indentation	EN433	<0.1mm	<0.1mm	<0.1mm	<0.15mm
Castor Chair Resistance	EN425/ISO 4918 25000 cycles	Pass	Pass	Pass	Pass
Colour Fastness to Light	ISO 105 B02	>6	>6	>6	>6
Dimensional Stability	EN434	<0.25%	<0.25%	<0.25%	<0.25%
Squareness and Straightness	EN427	<0.12mm / <0.15mm	<0.08mm / <0.10mm	<0.10mm / <0.10mm	<0.20mm / <0.30mm
Stain Resistance	EN423	Pass	Pass	Class 5 (unchanged)	Class 5 (unchanged)
Flammability	EN13501-1:2007	BfI-S1	Bfl-S1	Bfl-S1	BfI-S1
Formaldehyde Emission	EN14041:2004	Class E1	Class E1	Class E1	Class E1
Fungi Resistance	ISO846	Growth Intensity 0	Growth Intensity O	-	-
Water Resistant	-	100%	100%	100%	100%
VOC Emission	-	A+	A+	A+	A+
REACH	EC No 1907/2006	Pass	Pass	Pass	Pass
Thermal Resistance	m²K/W	-	-	0.042	0.074
Underfloor Heating	-	Suitable, Max 27°C	Suitable, Max 27°C	Suitable, Max 27°C	Suitable, Max 27°C

Luvanto Premium Additions all come with 0.55mm wear layer, so are suitable for heavy domestic and commercial use; and come with the peace of mind of Luvanto's 25 years Domestic and 10 years Commercial warranty.

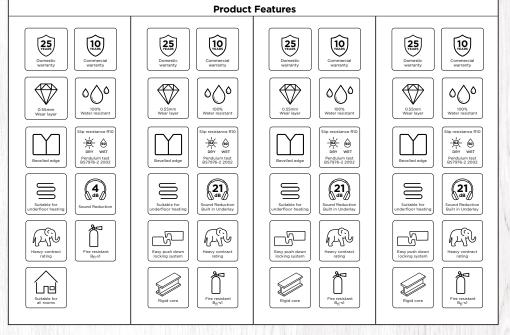

Luvanto Luxury Design Flooring Unit 2 Hurricane Drive, Liverpool. L24 8RL Tel: 0151 427 6000 Fax: 0151 427 0484 Email: sales@luvanto.com

www.luvanto.com